


LC SIMPLEX SM ANAEROBIC CNTR 10PK

Part Number: CNF-LC-SM

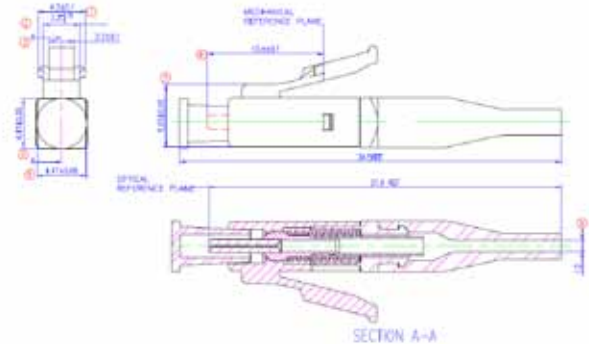

Specification

Standards	Meets EIA/TIA 604-10 & IEC61754-20standards
Economical	Both design and termination process
Snap-in Connector Design	Precision mechanical dimensions
Time	Reduces assembly time and simplifies training
Stabile Performance	<0.2 dB typical MM <0.15 dB typical SM
Operating Temperature	-20 °C ~ 70 °C
Storage Temperature	-40 °C ~ 85 °C
Cable Biameter	0.9mm
Type	SO: Simplex & One Piece
Ferrule Type	0.126~0.127mm
Concentricity	0.001
Coupling & Duplex Clip Color	Blue
Boot Color	White

Applications

Telecommunication networks
Data communication networks
CATV networks
Active device termination
Instrumentation